





**REF. 9468 DUOX PLUS VEO-XL 7" MONITOR**

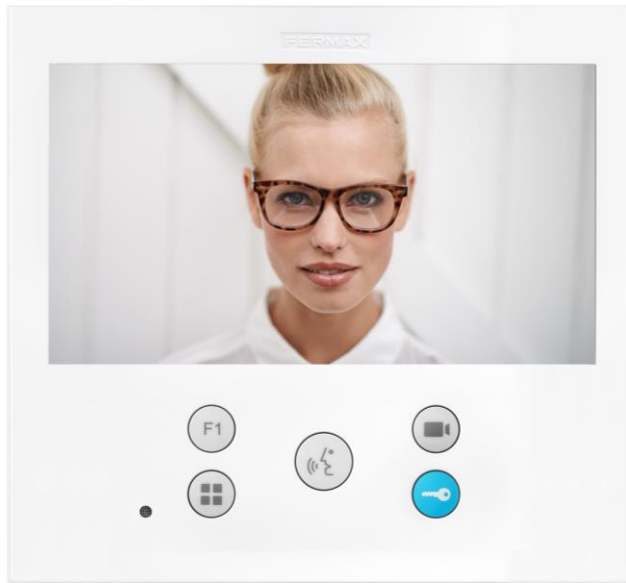

Hands-free DUOX PLUS VEO-XL monitor is characterized by its small size and extra-flat thickness. Thanks to its OSD menu and the layout of the buttons, interaction with the user is simple and intuitive. Made of high impact ABS plastic. Texturised finish for easy cleaning and ultraviolet protection. VEO-XL incorporates a 7" (16:9) panoramic color TFT screen. Its balanced design of pure lines is distinguishing, modern and minimal.

When a call is received, the image appears automatically. When the  button is pressed a conversation with the visitor can take place. The image is de-activated automatically after 90 seconds, or when the  button is pressed again. To open the door, press the button .

**ACCESORIES**



Ref. 9447

**CONNECTOR**

9447 DUOX PLUS CONNECTOR  
Necessary to mount the monitor on the wall surface. Dimensions: 147 x 100 x 13.5 mm



Ref. 9420

**DESKTOP**

9420 VEO-XS/VEO-XL MONITOR DESKTOP SUPPORT  
Fermax desktop support allows a call from the entrance to be answered from the office desktop. Manufactured in the highest quality stainless steel (AISI 316L). Connector ref. 9447 to be ordered separately. 2 m cable + connection box included.



Ref. 3389

**REPLACEMENT**

3389 UNIVERSAL LARGE FRAME 210X240  
Universal frame with an extra slim format, it is manufactured in a high resistant ABS plastic with a texturised finish. In replacement works, allows to cover the space left by older equipment. In addition, it keeps the wall protected from the dirt produced by the use of telephones and monitors. Dimensions 210 x 240 x 10 mm.

GENERAL CHARACTERISTICS	9468
Technology	DUOX PLUS (non-polarised 2 wire full digital system)
Audio/Video system	Audio/Video Color
Set-up (Installation)	Surface mounted (order connector ref. 9447 separately)
Desktop support	Yes (ref. 9420)
Hands-free communication	Yes
Press-to-talk communication configurable	Yes
Induction loop included	No (order monitor ref. 9478 with induction loop)
Screen dimensions	7" (Panoramic 16:9)
Screen resolution (H x V)	800 x 480
Color of the product	Matt white
Number of pushbuttons	5
Kind of pushbuttons	Mechanical (silicon)
Number of leds for lighted indications	3 (red, blue, green with different states)
PROGRAMMING OF THE TERMINAL ADDRESS	
From the terminal	From the OSD menu
From the outdoor panel or guard unit	Yes
From the outdoor panel throughout the apartment door bell	Yes
FEATURES	
Automatic picture capture when the visitor calls (PHOTOCALLER)	Yes (1 photo/call, until 150 photos, 368 x 288 pixels). Disabled by default. To be enabled by the user.
Guard unit call	Yes (by means of the door release button)
Auto-on	Yes (with 3 outdoor panels/cameras)
OSD menu	Yes
Additional function F1	Yes (Button F1 sends a negative and/or command)
Additional function F2	Yes (it only sends command, no negative)
Apartment door bell differentiated from the outdoor panel	Yes
Connection for additional devices (call extension, light/buzzer activator, etc.)	Yes (ref. 2040, ref. 2438, ref. 3267)
Additional terminals on the same address	Yes, max. 2 additional terminals (additional power supply can be required)
Doormatic (automatic door release for offices, etc.)	Yes (configurable until 12h). Green Led ON.
ADJUSTMENTS	
Date and time	Yes
Ring tones selection	Yes (5)
Call volume control	Yes (10 levels by OSD menu and sliding wheel)
Do-not-disturb mode	Yes (by OSD menu) + Red Led indication
Audio volume control	Yes (10 levels by OSD menu and sliding wheel)
Brightness, color and contrast control	Yes (by OSD menu)
TECHNICAL FEATURES	
Product dimensions (width x height x depth) mm	185 x 185 x 21
Time to answer or open the door since the call is done	30 s.
Conversation time	90 s.
Conversation privacy	Sí
Voltage	18-24 Vdc
Maximum consumption (W)	9 W
Standby consumption (W)	1.15 W
Working temperature (°C, °F); Humidity	[-5°C, +40°C][23°F, 106°F]; [0%, 90%]
Line adaptor included in the terminal	Yes (A, C, default position OFF)
Connections	Bin, Bin, Bout, Bout, -, A+, F1, T

