VIDEO DOOR ENTRY SYSTEMS

DUOX PLUS WIFI Monitor

VEO and VEO-XS 4.3" colour monitors and VEO-XL 7" colour monitors, made from high-impact ABS plastic and UV protection, with settings for contrast, brightness, colour, audio volume, call ring tone volume, do not disturb function, doorbell, date and time, silicone buttons for activating the lock release that are pleasant to the touch, access to the main OSD menu from the screen, activation of the outdoor panel camera, and various other additional configurable functions such as activating second access, courtesy light, etc. Available in white and for surface installation.

Two WiFi monitor options: the VEO monitor with its unique handset design incorporating a magnet that enables the user to hang up correctly at the end of the conversation, and the VEO-XS and VEO-XL hands-free


VEO, VEO-XS and VEO-XL DUOX PLUS WiFi monitors are equipped with a WiFi connection that allows call forwarding to mobile devices. Thanks to the Fermax BLUE app, the functions of the video door phone can be managed from a smartphone or a tablet, in order to connect you to your home, wherever you are.




Pick up

Reject/Hang up

Door opening













With Duox Plus WiFi monitors everything changes

Download the free app BLUE and you'll be able to receive calls from your video door entry system on your smartphone or tablet, wherever you are. What is more, you can manage several houses from the same mobile device. Whether you are travelling, at work or on holidays, it'll be like being at home.

MONITORS

Functionalities

FERMAX





Advanced Functions





Ringtone selection images with the call and call volume



Additional function F1



Additional function F2



1))

adjustment

configuration menu



"Do not disturb" mode



Pairing with WiFi network. Only for WiFi models

Scan the code to find out what you can do with the new **DUOX PLUS WiFi MONITORS**



Basic Functions



Lock release

(ر، ک[°]

models

Activate / deactivate Activation of pre-configured communication. Only in VEO-XS y VEO-XL additional function

F1




Auto-on. Camera and panel switching



OSD menu. Access advanced functions









Duox Plus Monitors without WiFi connectivity

Installation extension with the secondary terminal

DUOX PLUS Monitors

DUOX PLUS Telephones


















LOFT

ILOFT

Product specifications

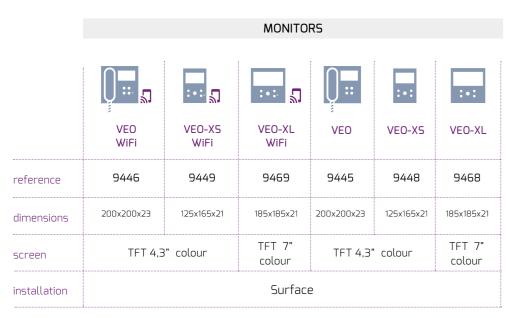



Dimensions (width) x (height) x (depth) mm



All DUOX PLUS monitors have a model that includes a handset with inductive loop. Adapted for people with hearing impairment.



www.fermax.com













Connected video door entry systems