




Package Contents: 4G LTE Router, Power adapter, QIG, UTP Cable, 4G Antenna

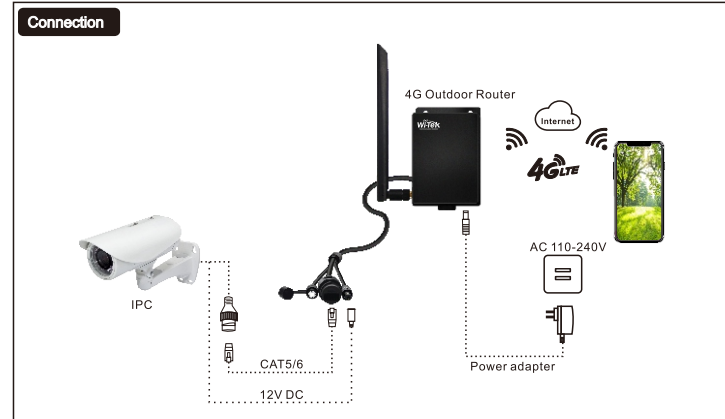

Connector and LED Explanation

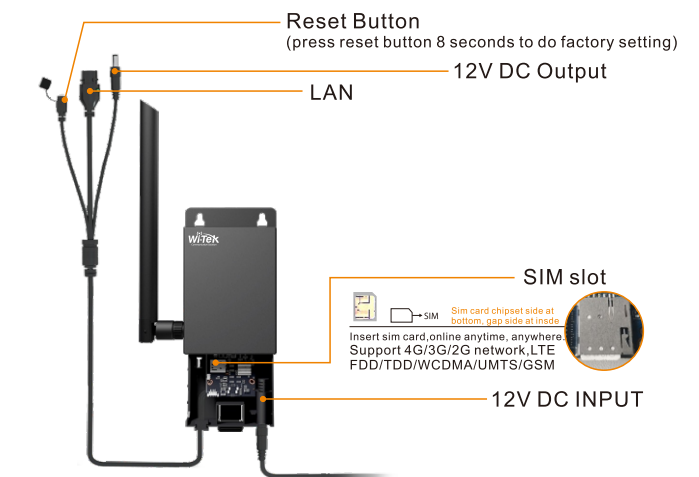

There are 3 LED(POW/4G/2.4G) on PCB Board

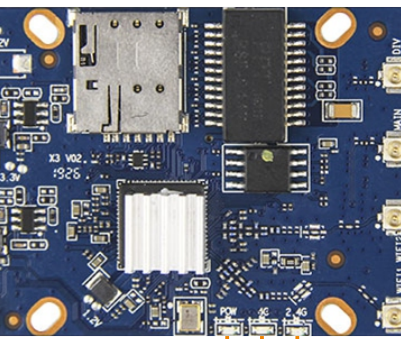


Power Status ← 3G/4G Status → Wi-Fi Status

LED	Function	Description
POW	Power Status	on: Successfully to connect with power off: Fail to connect with power
4G	3G/4G Status	on: 3G/4G working flicker: Transmitting data off: 3G/4G not work
2.4G	Wi-Fi Status	on: Wi-Fi working flicker: Transmitting data off: Wi-Fi not work

Equipment configuration

Login WEB page


1. set PC ip: 192.168.1.49, default gateway P: 192.168.1.88, then connecting PC port to any LAN of LTE CPE with RJ45 UTP. Waiting for the connection to succeed, the LTE Router's LED is always on.

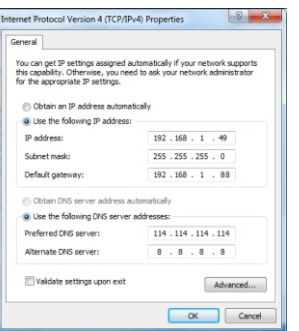


2. Open IE Browser, Input address: http://192.168.1.88/, enter the user login page. Enter the default username and password admin/admin, which is printed on the bottom of LTE Router;




3. if LTE Wi-Fi Router successful receive 4G signal, you can check status -> overview -> 4G status show 4G access information; if 4G status has access information, but still not have internet, please click Flow Switch at top right corner (This is a button to control on/off 4G internet flow)

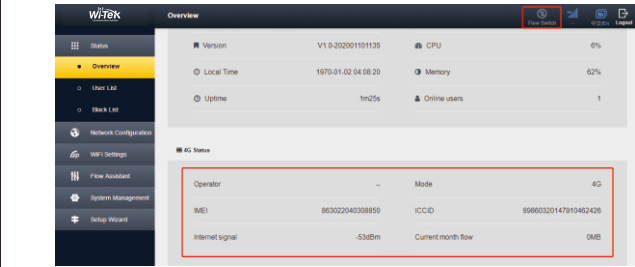

If in 4G status page not show 4G access information, please go to Network Configuration -> APN Settings to set APN parameters (you can call your card ISP to get APN parameters)

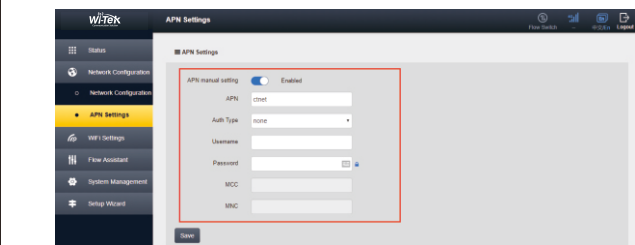


4. you can go to Wi-Fi Setting -> Wi-Fi configuration to modify Wi-Fi SSID and Password for share Wi-Fi to end users access

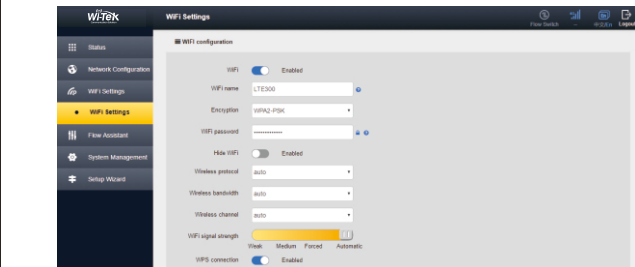


Application Case

1. 1 pcs IP camera

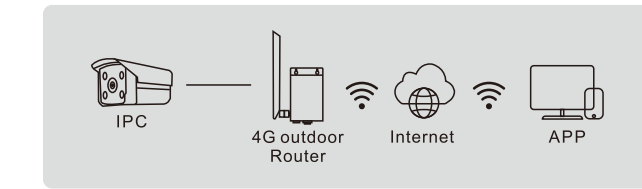

2. more than 1 pcs IP camera

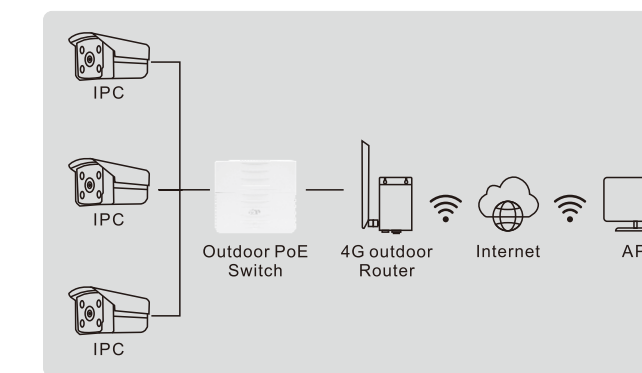

Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

- If the product defects within three months after purchase, we will provide you a new product of the same model.
- If the product defects within the three-year warranty period, we will provide the professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disaster, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card losing will disqualify the product from limited warranty.



For technical support and other information, please visit: www.wireless-tek.com